


N70LED

The Nordic N70LED Taillight is designed for continuous heavy duty applications on heavy duty machines where incandescent taillights will fail due to high vibration and shock. Fully encapsulated LED electronics provide excellent protection against vibration, shock, water and dirt ingress.

LED technology creates more value through:

- Long lifetime
- High operational safety
- Minimum power consumption, thus energy savings
- Wear- and maintenance-free
- Increased safety through quick switch-on behaviour

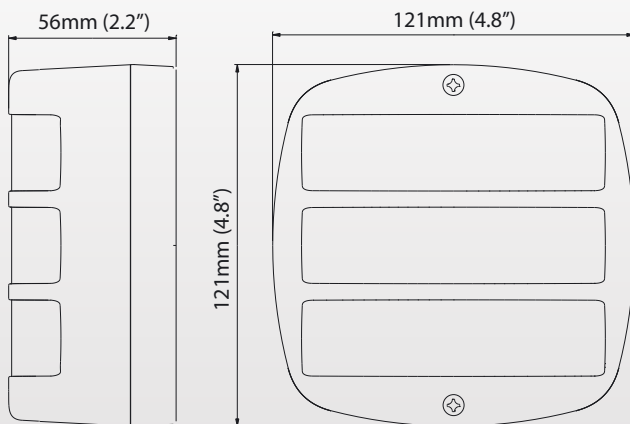

N70LED Specifications

Approval:	ECE approved
Nominal Voltage DC:	24V: 18-32V
Power Consumption:	Tail: 0.4W Brake: 1.4W Indicator: 1.4W
Nominal Current at 24V:	Tail: 17mA Brake: 58mA Indicator: 58mA
Electronics:	Integrated -Epoxy Encapsulated
Connector:	AMP
Mount:	M6x25 2pce / Flushmount
Vibration:	20G rms 24-2000Hz
Lens:	PC
Body:	PA66
Weight:	0.4 kg
IP Rating:	IP68
Salt Mist:	ISO9227
EMC:	ISO13766, ISO14982 ISO7637-2
Operating Temperature:	-40°C...+50°C